



Threaded Connection, Hexagonal

Model: DIT-6



PRODUCT DESCRIPTION



Detachable design for easy cleaning and maintenance



Often used in cement plants and the petrochemical equipment industry

PRODUCT SPECIFICATION

Process connection

1/4, 3/8, 1/2, 3/4, 1
PT, G, NPT, M

Instrument connection

1/4, 3/8, 1/2
PT, G, NPT, M

Scale ranges

0 ... 10 bar to 0 ... 250 bar,
or all other equivalent pressure ranges

Material

Body: 316L SS
Diaphragm: 316L SS


Medium temperature

0°C ... 80°C,
81°C ... 200°C,
201°C ... 400°C

Others

Welded with instrument

DIMENSIONS

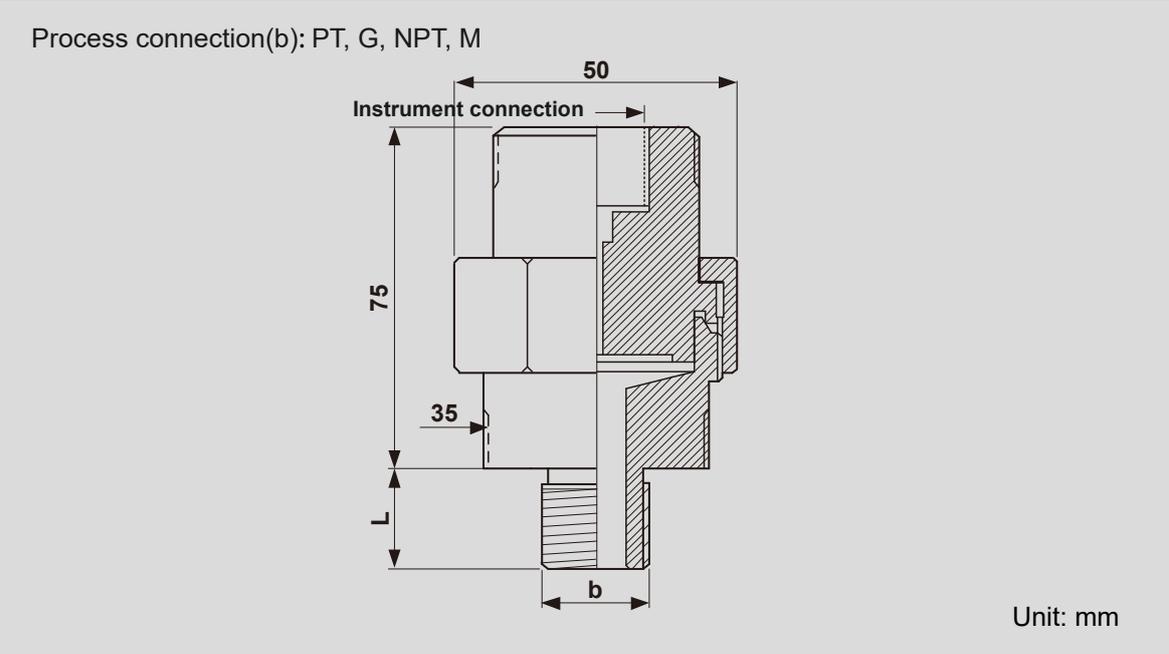

b	1/4	3/8	1/2	3/4	1
L	13	15	20	20	23



Gauging your needs!

ORDERING INFORMATION

Model / Process connection / Pressure gauge / Nominal size / Scale range / Options

CONTACT INFORMATION

ADD : 3F.-3, No. 4, Ln. 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City 241402 , Taiwan (R.O.C.)

TEL : +886-2-25504512

MAIL : info@sinjiagauge.com

WEB : www.sj-gauge.com

- For any changes to the specifications of this catalogue, the latest version shall prevail. -

Copyright © 2024 by SIN JIA ENTERPRISE CO., LTD. All rights reserved.