



Threaded Connection, Intergrated PP

Model: DIT-PP



PRODUCT DESCRIPTION

- ▼ Polypropylene has excellent anti-corrosion properties
- ▼ One-piece molded, rarely cracks or leaks
- ▼ Mainly used in printing circuit boards, liquid filter pumps, etc.

PRODUCT SPECIFICATION

Connection location

Bottom mount

Diameter

2.5"

Scale ranges

0 ... 1 bar to 0 ... 20 bar,
or other equivalent units of pressure

Accuracy

±1.6% F.S.

Process connection

PP
1/2PT (Female)

Diaphragm

Viton, PTFE

Case/ring

Polypropylene, black

Window

Acrylic

Dial

Aluminum
Black scale on white

Pointer

Standard pointer, aluminium, black

Bourdon tube

Copper alloy

Case filling

Without, glycerine



Medium temperature

0°C ... 60°C

Accessories

Adjustable set pointers
(red / red and green)

DIMENSIONS

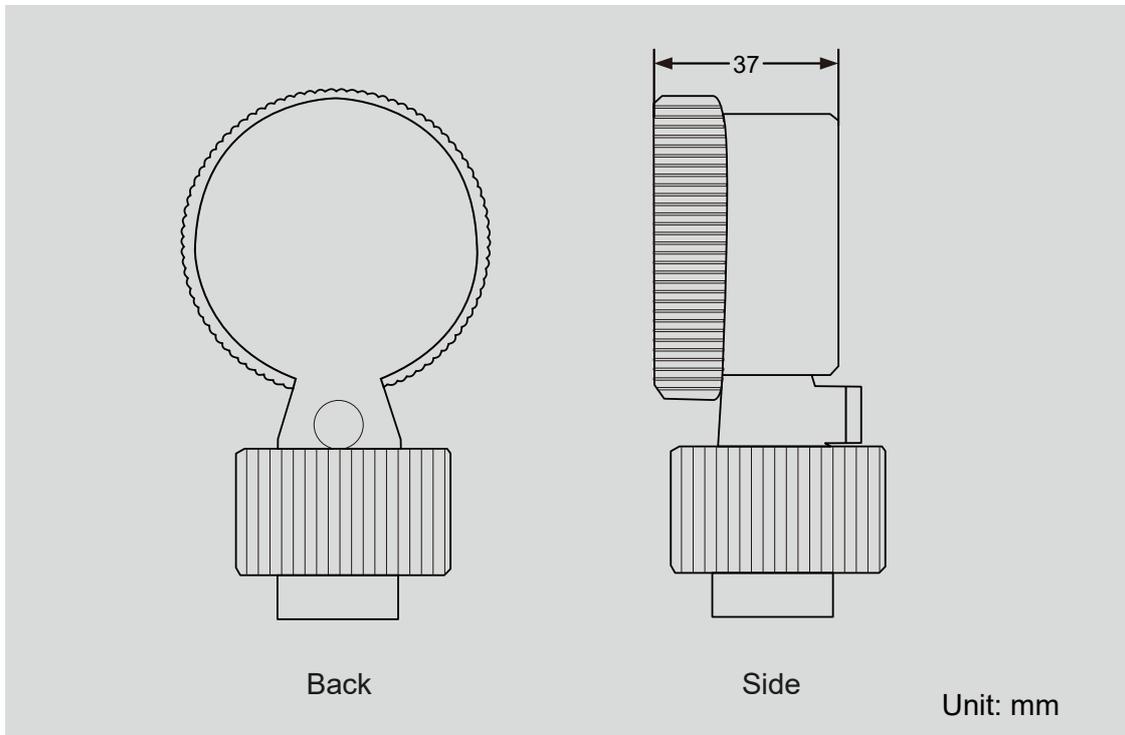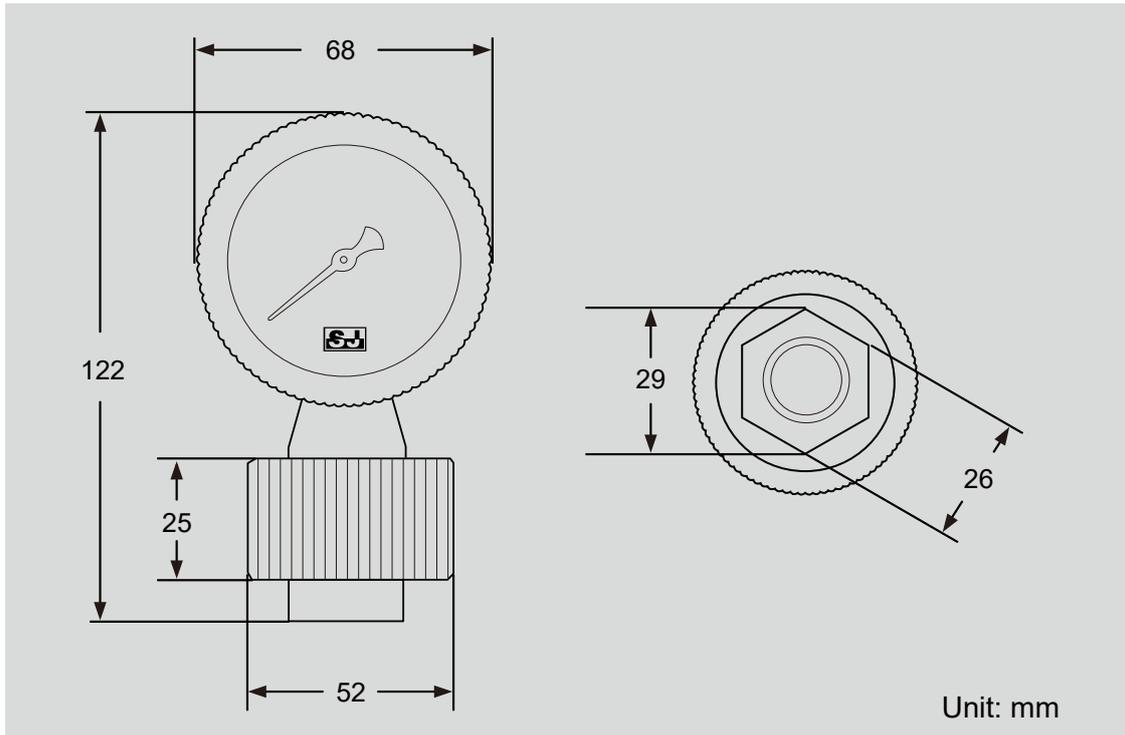



Gauging your needs!

ORDERING INFORMATION

Model / Scale range / Options

CONTACT INFORMATION

ADD : 3F.-3, No. 4, Ln. 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City 241402 , Taiwan (R.O.C.)

TEL : +886-2-25504512

MAIL : info@sinjiagauge.com

WEB : www.sj-gauge.com

- For any changes to the specifications of this catalogue,the latest version shall prevail. -

Copyright © 2024 by SIN JIA ENTERPRISE CO., LTD. All rights reserved.