



Electric Contact Gauge, Compact

Model: MPS



PRODUCT DESCRIPTION



Automatically resetting switch design



Wide pressure range, apply to multi work situation



Application to air \ water pressure control, Indoor air conditioner system or more...

PRODUCT SPECIFICATION

Pressure range

0.2 ... 45 bar

Overpressure

5000 psi

Process connection

Brass, stainless steel

1/8, 1/4

PT, PF, NPT, UNF

Connector

6.35×0.8•4.8×0.8

Wire terminal

(customizable length & terminal)

Switch type

SPST(NO/NC) \ SPDT

Reset pattern

Automatic/manual

Electronic parameter

120VAC 6FLA, 34.8LRA

240VAC 3FLA, 15LRA

120/240VAC 375VA

36VDC 3A

Connection type

Insert / cable out

Ambient temperature

Low Pressure: -30°C ... 65°C

High Pressure: -35°C ... 120°C

MODEL TYPE



Type A

Insert type,Brass thread bolt



Type B

Insert type,Stainless steel thread bolt



Type C


Insert type,No thread bolt



Type D

Electric cable (Customized Length is able)
Copper thread bolt

DIMENSIONS

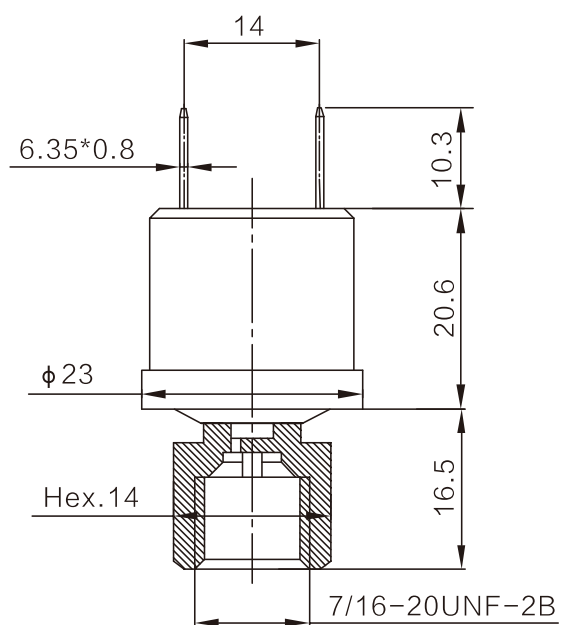

Unit : mm



Gauging your needs!

ORDERING INFORMATION

Switch type / Thread material / Thread type / Electrical connections / Reset pressure / Operating pressure

CONTACT INFORMATION

ADD : 3F.-3, No. 4, Ln. 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City 241402 , Taiwan (R.O.C.)

TEL : +886-2-25504512

MAIL : info@sinjiagauge.com

WEB : www.sj-gauge.com

- For any changes to the specifications of this catalogue, the latest version shall prevail. -

Copyright © 2024 by SIN JIA ENTERPRISE CO., LTD. All rights reserved.