



PRODUCT SPECIFICATION

Pressure Snubber

Model: PRA-SB



Maximum Rated Pressure

150, 400, 600 bar

Body Material

Brass, 304 Stainless Steel,
316 Stainless Steel, Monel 400

Process Connection

1/8, 1/4, 3/8, 1/2
PT, G, NPT, M (Male)

Instrument Connection

1/8, 1/4, 3/8, 1/2
PT, G, NPT, M (Female)

Gasket Material

Nitrile Rubber (NBR),
Polytetrafluoroethylene (PTFE),
Fluororubber (FPM / Viton)

Maximum Operating Temperature


60°C - 120°C

PRODUCT DESCRIPTION

▼
Buffers to avoid damage by excessive pressure change, extending service life

▼
Internal and external threads can be customized by type and size

DIMENSIONS

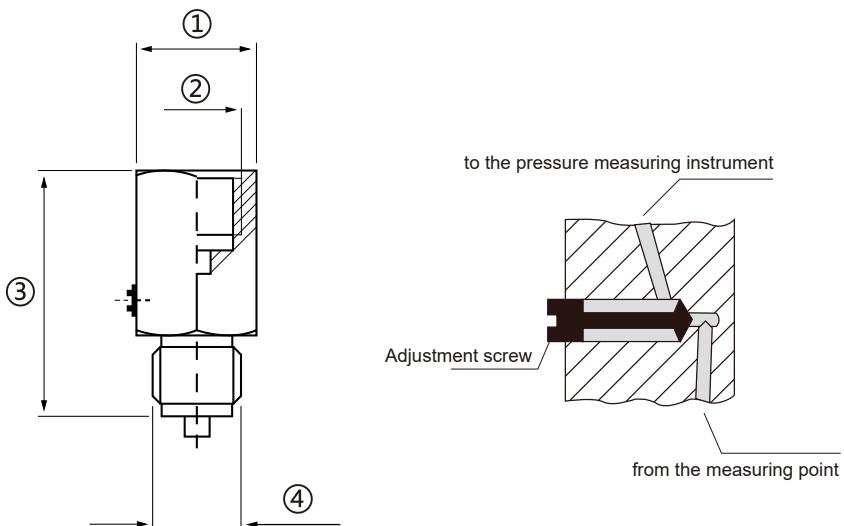

Dimensions(mm)			
①	②	③	④
SW27	G1/2	61	G1/2B

The product images displayed in the catalog are illustrative, and the actual products will be customized to your requirements.



Gauging your needs!

ORDERING INFORMATION

Process connection / Material / Options

CONTACT INFORMATION

ADD : 3F.-3, No. 4, Ln. 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City 241402 , Taiwan (R.O.C.)

TEL : +886-2-25504512

MAIL : info@sinjiagauge.com

WEB : www.sj-gauge.com

- For any changes to the specifications of this catalogue, the latest version shall prevail. -

Copyright © 2024 by SIN JIA ENTERPRISE CO., LTD. All rights reserved.