



# Differential Pressure Gauge, Duplex

Model: PRDD



## PRODUCT DESCRIPTION



The pressure gauges are equipped with two independently working bourdon tube measuring systems



LED lighting for operating voltages of DC24V or AC110V



Typically used in filters and rail braking systems

## PRODUCT SPECIFICATION

### Connection location

Lower back mount

### Nominal size

4"

### Scale ranges

0 ... 25bar, or other equivalent units of pressure, vacuum or compound

### Accuracy

±1.6% F.S.

### Process connection

M14 x 1.5

### Case/Ring

Carbon steel

### Window

Glass

### Dial

Aluminum, white, black lettering

### Pointer

Aluminum, black and red

### Movement

Copper alloy

### Bourdon tube

Copper alloy

### Ambient temperature

-29°C ... 93°C


### Medium temperature

-30°C ... 70°C

### Lighting power supply

DC24V, AC110V

## DIMENSIONS

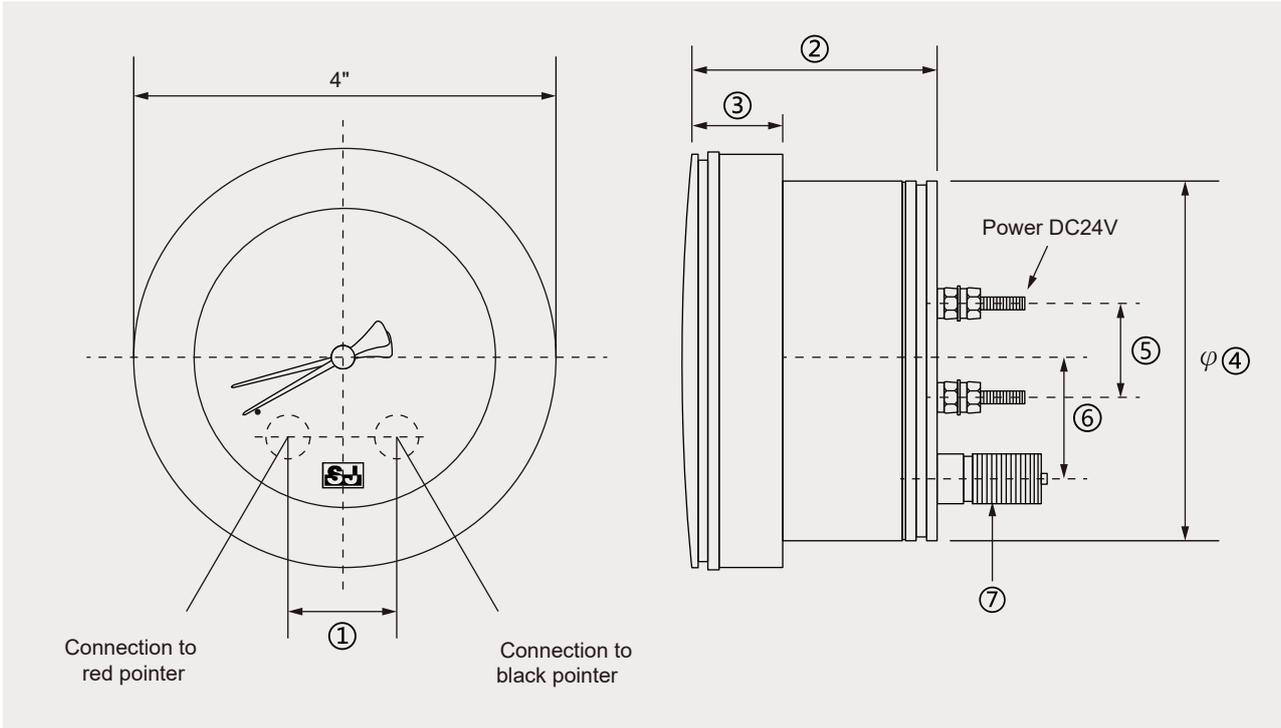

Dimensions (mm)							
NS	①	②	③	④	⑤	⑥	⑦
4"	34	65	28	100	25	29	M14x1.5



*Gauging your needs!*

## **ORDERING INFORMATION**

Model / Scale range / Process connection / Lighting power supply / Options

## **CONTACT INFORMATION**

ADD : 3F.-3, No. 4, Ln. 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City 241402 , Taiwan (R.O.C.)

TEL : +886-2-25504512

MAIL : [info@sinjiagauge.com](mailto:info@sinjiagauge.com)

WEB : [www.sj-gauge.com](http://www.sj-gauge.com)

- For any changes to the specifications of this catalogue, the latest version shall prevail. -

Copyright © 2024 by SIN JIA ENTERPRISE CO., LTD. All rights reserved.