



Differential Pressure Gauge, Low Differential Pressure

Model: PRMD



PRODUCT DESCRIPTION

- ▼ Measures the small pressure difference between two pressure sources
- ▼ Only suitable for measuring gases, can not measure liquid
- ▼ Used in hospitals, laboratories, factories, gas stations and storage tanks
- ▼ Same specifications as Series 2000 magnehelic®

PRODUCT SPECIFICATION

Nominal size
4.5"

Scale ranges
0 ... 3 mmH₂O to 0 ... 5000 mmH₂O,
or other equivalent units of pressure or
compound

Accuracy
±2% F.S. to ±4% F.S., upon scale range

Process connection
1/8 NPT (female)

Case/Ring
Die-cast aluminum

Window
Acrylic

Accessories
Screws, connection fittings

Accessories (option)
Round back panel,
stainless steel flush mount bracket A,
stainless steel flush mount bracket B

Pressure limitation
-20 inHg ... 15 psi

Medium temperature
-7°C ... 60°C

ACCESSORIES



▼ Accessory kits (standard)

Screws, connection fittings

ACCESSORIES (OPTION)



▼ Accessories

Stainless steel flush mount
bracket A



▼ Accessories



Round back panel



▼ Accessories

Stainless steel flush mount
bracket B

DIMENSIONS

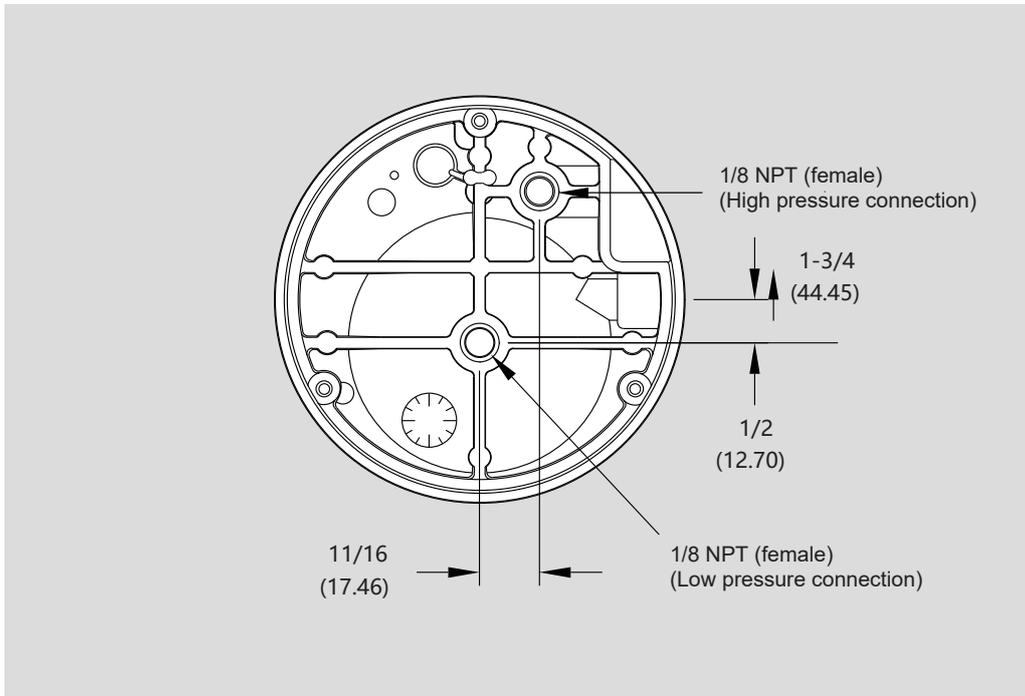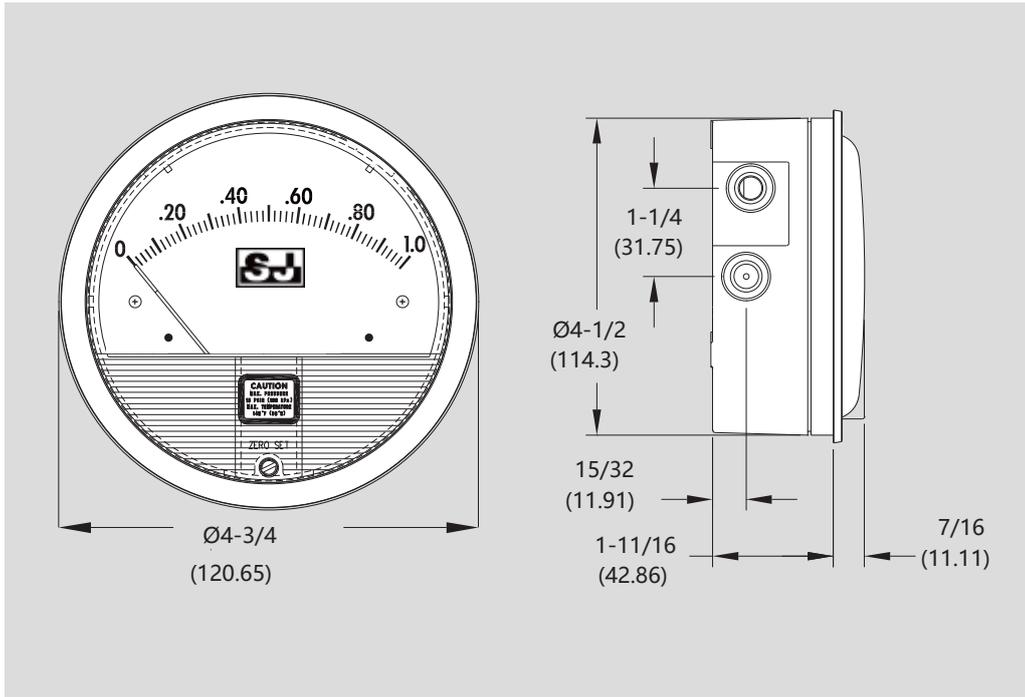



Gauging your needs!

ORDERING INFORMATION

Model / Scale range / Accessory / Options

CONTACT INFORMATION

ADD : 3F.-3, No. 4, Ln. 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City 241402 , Taiwan (R.O.C.)

TEL : +886-2-25504512

MAIL : info@sinjiagauge.com

WEB : www.sj-gauge.com

- For any changes to the specifications of this catalogue,the latest version shall prevail. -

Copyright © 2024 by SIN JIA ENTERPRISE CO., LTD. All rights reserved.