



# Stainless Steel Pressure Gauge with Solid Baffle Wall, Safety

Model: PRSF



## PRODUCT DESCRIPTION

▼  
A solid baffle wall between the measuring system and front dial to protect the operator

▼  
When experiencing failure, the case is equipped with a blow-out back to eject dangerous media out the back of the case safely

## PRODUCT SPECIFICATION

### Nominal size

4"

### Scale ranges

0 ... 0.6 bar to 0 ... 1000 bar  
or other equivalent units of pressure,  
vacuum or compound

### Accuracy

±1.0% F.S. ,

### Process connection

316L SS

1/4, 3/8, 1/2

PT, G, NPT

### Case

304 stainless steel, 316 stainless steel,  
with solid baffle wall and blow-out back

### Window

Safety glass

### Dial

Aluminum alloy, black scale on white

### Pointer

Black aluminum alloy,  
adjustable pointers

### Filling liquid

Without, glycerine, silicone oil


### Ambient temperature

40°C ... 60°C (non-liquid-filled)  
-20°C ... 60°C (liquid-filled)

### Medium temperature

≤ 200°C (non-liquid-filled)  
≤ 100°C (liquid-filled)

## DIMENSIONS

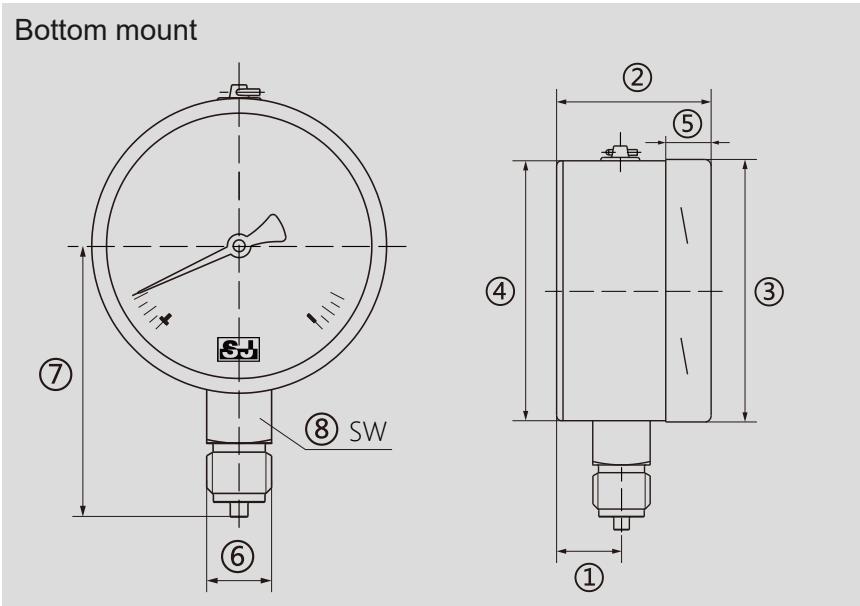

Dimensions (mm)								
NS	①	②	③	④	⑤	⑥	⑦	⑧
4"	25	59.5	101	100	17	G1/2B	87	22



*Gauging your needs!*

## ORDERING INFORMATION

Model / Scale range / Process connection / Options

## CONTACT INFORMATION

ADD : 3F.-3, No. 4, Ln. 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City 241402 , Taiwan (R.O.C.)

TEL : +886-2-25504512

MAIL : [info@sinjiagauge.com](mailto:info@sinjiagauge.com)

WEB : [www.sj-gauge.com](http://www.sj-gauge.com)

- For any changes to the specifications of this catalogue, the latest version shall prevail. -

Copyright © 2024 by SIN JIA ENTERPRISE CO., LTD. All rights reserved.