



Digital Pressure Gauge, Multi-Output Signal

Model: TWM30



PRODUCT DESCRIPTION


- ▼ Support multiple working modes
- ▼ Built-in buzzer with sound-light alarm, field programmable alarm pressure value
- ▼ Used to measure fan and blower pressure, filter resistance, medical equipment, etc

PRODUCT SPECIFICATION

Electrical connections Cable outlet (0.5 cm)	Relay 2 SPDT RELAYS 3A@250VAC/30VDC
Nominal size 4.5"	Control signal None, 2 SPDT RELAYS
Pressure medium Gas	Power consumption ≤ 2.5W
Scale ranges 0 type: -1000 ... 1000 Pa 2 type: -10000 ... 10000 Pa 6 type: -100 ... 100 Pa	Protection level IP 54
Pressure units Pa, kPa, mbar, mmHG, inWC, mmWC	Weight 360 g
Accuracy ±1.0% F.S.	
Process connection Quick coupler Air inner way: front panel, back panel, side panel	
Case/Ring ABS	
Pressure limitation 0 type: 10 kPa 2 type: 80 kPa 6 type: 5 kPa	
Ambient temperature -20°C ... 70°C	
Medium temperature -10°C ... 60°C	
Display LCD, switchable backlight button	
Voltage supply DC 16-30V	
Output signal None, 4-20mA & 0-10V, RS485	

The product images displayed in the catalog are illustrative, and the actual products will be customized to your requirements.

DIMENSIONS

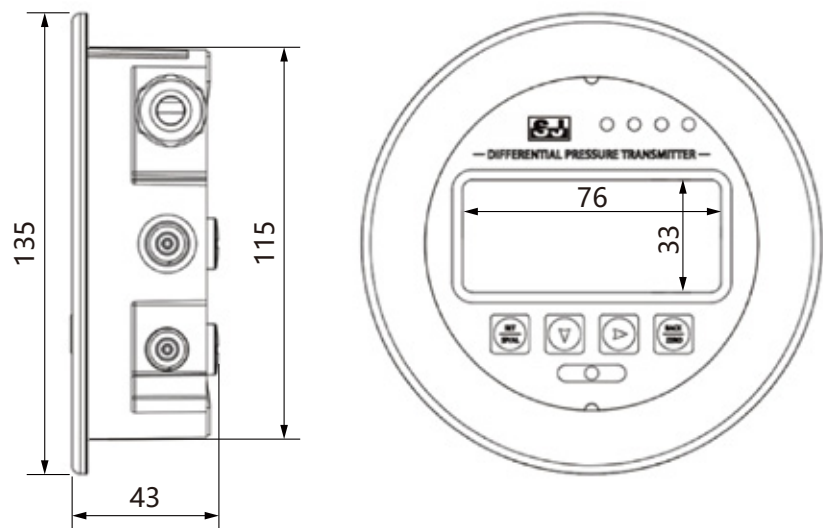

Unit: mm



Gauging your needs!

ORDERING INFORMATION

Model / Scale range / Output signal / Control signal / Options

CONTACT INFORMATION

ADD : 3F.-3, No. 4, Ln. 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City 241402 , Taiwan (R.O.C.)

TEL : +886-2-25504512

MAIL : info@sinjiagauge.com

WEB : www.sj-gauge.com

- For any changes to the specifications of this catalogue,the latest version shall prevail. -

Copyright © 2024 by SIN JIA ENTERPRISE CO., LTD. All rights reserved.